







Mini cylinder(Aluminum barrel)——MAL Series

Product series

Series name	Mounting type				Acting type	Bore size	Collocation of sensor switch	
	Basic	LB	FA	SDB			CS1-M	DS1-M
Double acting type: MAL 	●	●	●	●	Double acting	20 25 32 40		
Single acting type: MSAL, MTAL 	●	●	●	●	Single acting		●	●
Double rod type: MALD 	●	●	●	●	Double acting		●	●
Adjustable stroke type: MALJ 	●	●	●	●			●	●
Page	254				257		403	



Installation and application

1. When load changes in the work, the cylinder with abundant output capacity shall be selected.
2. Relative cylinder with high temperature resistance or corrosion resistance shall be chosen under the condition of high temperature or corrosion.
3. Necessary protection measure shall be taken in the environment with higher humidity, much dust or water drops, oil dust and welding dregs.
4. Dirty substances in the pipe must be eliminated before cylinder is connected with pipeline to prevent the entrance of particles into the cylinder.
5. The medium used by cylinder shall be filtered to 40 μ m or below.
6. Anti-freezing measure shall be adopted under low temperature environment to prevent moisture freezing.
7. To avoid side load, otherwise, piston rod will be bent and deformed and damage the thread at the end of the rod. Single-acting type can not be added in return;
8. If the cylinder is dismantled and stored for a long time, please to conduct anti-rust treatment to the surface. Anti-dust caps shall be added in air inlet and outlet ports. The front and back cover can not be dismantled, which shall be especially noticed.

Criteria for selection: Cylinder thrust

Unit: Newton(N)

Bore size (mm)	Rod size (mm)	Acting type	Pressure area (mm ²)	Operating pressure(MPa)							
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	
20	8	Single acting	Push side	314.0	-	12.6	44.0	75.4	106.8	138.2	169.6
			Pull side	263.8	-	2.6	28.9	55.3	81.7	108.1	134.4
		Double acting	Push side	314.0	31.4	62.8	94.2	125.6	157.0	188.4	219.8
			Pull side	263.8	26.4	52.8	79.1	105.5	131.9	158.3	184.7
25	10	Single acting	Push side	490.6	-	29.2	78.3	127.4	176.4	225.5	274.5
			Pull side	412.1	-	13.5	54.7	96.0	137.2	178.4	219.6
		Double acting	Push side	490.6	49.1	98.1	147.2	196.2	245.3	294.4	343.4
			Pull side	412.1	41.2	82.4	123.6	164.8	206.1	247.3	288.5
32	12	Single acting	Push side	804.3	-	76.6	157.0	237.3	317.7	398.1	478.5
			Pull side	691.2	-	54.0	123.0	192.1	261.2	330.3	399.4
		Double acting	Push side	804.3	80.4	160.9	241.3	321.7	402.2	482.6	563.0
			Pull side	691.2	69.1	138.2	207.4	276.5	345.6	414.7	483.8
40	16	Single acting	Push side	1256.6	37.5	163.1	288.7	414.3	539.9	665.5	791.1
			Pull side	1055.6	17.4	122.9	228.4	333.9	439.4	544.9	650.4
		Double acting	Push side	1256.6	125.7	251.3	377.0	502.6	628.3	754.0	879.6
			Pull side	1055.6	105.6	211.1	316.7	422.2	527.8	633.4	738.9




Mini cylinder(Aluminum barrel)



MAL Series



Symbol

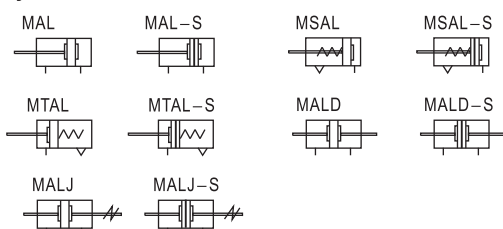

Product feature


1. Manufactured by our enterprise.
2. Front and back cover and cylinder tube are connected by threads.
3. Piston adopts heterogeneous two-way seal structure. It has compact size and has the function of grease reservation.
4. Front cover adopts self-lubrication bearing guide that has good performance of lubrication and guide.
5. There are several modes of back cover, which makes the installation of cylinder more convenient.
6. There are cylinders and mounting accessories with several specifications for your choice.

Ordering code

Model can to be changed Ordering code. Example:
 Production type: MALJ
 Bore size: 25mm
 Stroke: 80mm
 Adjustable stroke: 50mm
 Magnet: With magnet
 Mounting type: LB
 Thread type: NPT

Model: MALJ-25 × 80-50-S-LB-T

Ordering code: MALJ 25 S 0080 050 LB T

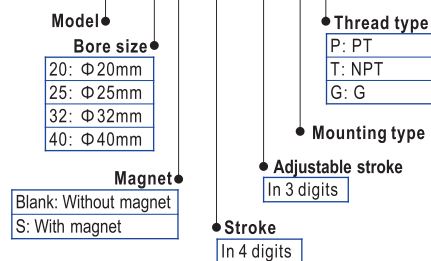

Specification

Bore size(mm)	20	25	32	40
Acting type	MSAL, MTAL	Single acting		
	Others	Double acting		
Fluid	Air(to be filtered by 40 μm filter element)			
Operating pressure	Double acting	0.1~1.0MPa(15~145psi)(1.0~10.0bar)		
	Single acting	0.2~1.0MPa(28~145psi)(2.0~10.0bar)		
Proof pressure	1.5MPa(215psi)(15bar)			
Temperature °C	-20~70			
Speed range mm/s	Double acting: 30~800		Single acting: 50~800	
Stroke tolerance	0~150 ^{+1.0} ₀		>150 ^{+1.4} ₀	
Cushion type	Bumper			
Port size ①	1/8"			1/4"



① PT thread, NPT thread and G thread are available. Add) Refer to P403~426 for detail of sensor switch.

Stroke

Bore size (mm)	Standard stroke (mm)												Max. std stroke	Max. stroke					
MAL	20	25	50	75	80	100	125	150	160	175	200	250	300	500	800				
	25	25	50	75	80	100	125	150	160	175	200	250	300	350	400	450	500	800	1200
	32	25	50	75	80	100	125	150	160	175	200	250	300	350	400	450	500	800	1200
	40	25	50	75	80	100	125	150	160	175	200	250	300	350	400	450	500	1200	1500
MSAL	20	25	50	75	100	125	150									150	-		
	25	25	50	75	100	125	150									150	-		
	32	25	50	75	100	125	150									150	-		
MTAL	20	25	50	75	100	125	150									100	-		
	25	25	50	75	100	125	150									100	-		
	32	25	50	75	100	125	150									100	-		
MALD	20	25	50	75	100	125	150	160	175	200						200	300		
	25	25	50	75	80	100	125	150	160	175	200	250			250	300			
	32	25	50	75	80	100	125	150	160	175	200	250			250	300			
MALJ	20	25	50	75	100	125	150	160	175	200					250	300			
	40	25	50	75	80	100	125	150	160	175	200	250			250	300			

Note) Consult us for non-standard stroke.

Explain of model

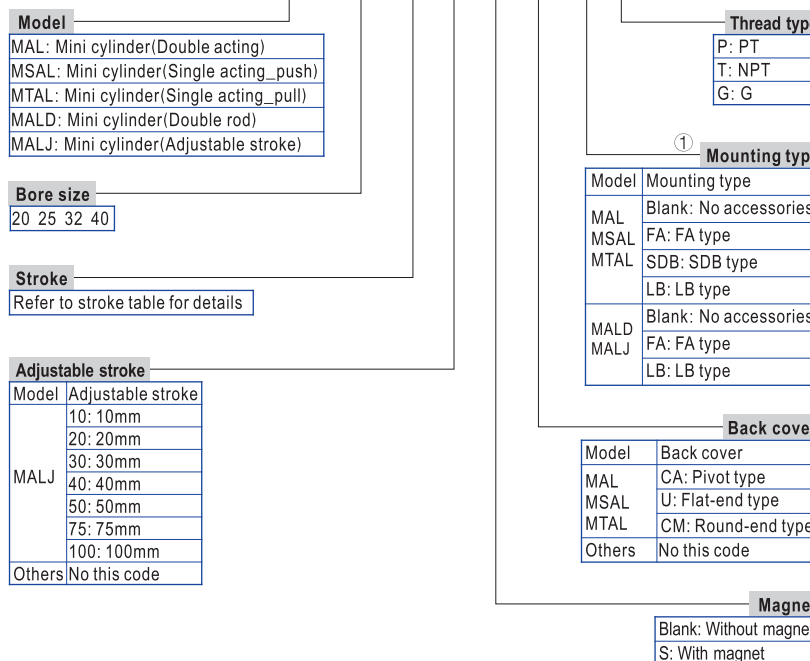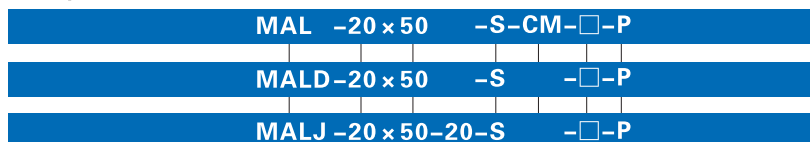

① Please refer to page 257 for accessory parts.




Mini cylinder(Aluminum barrel)



MAL Series

Inner structure and material of major parts


MAL-CA

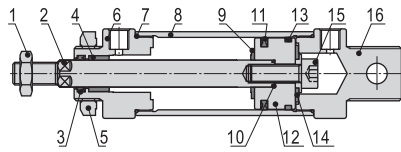

NO.	Item	Material
1	Rod nut	Carbon steel
2	Piston rod	Carbon steel with 20 μ m chrome plated
3	Front cover packing	NBR
4	Bushing	Wear resistant material
5	Front cover nut	Carbon steel
6	Front cover	Aluminum alloy
7	O-ring	NBR
8	Barrel	Aluminum alloy
9	Bumper	NBR
10	O-ring	NBR
11	Piston seal	NBR
12	Piston	Aluminum alloy
13	Wear ring	Wear resistant material
14	Washer	Free cutting material
15	Bolt	Carbon steel
16	Back cover	Aluminum alloy

Dimensions

MAL

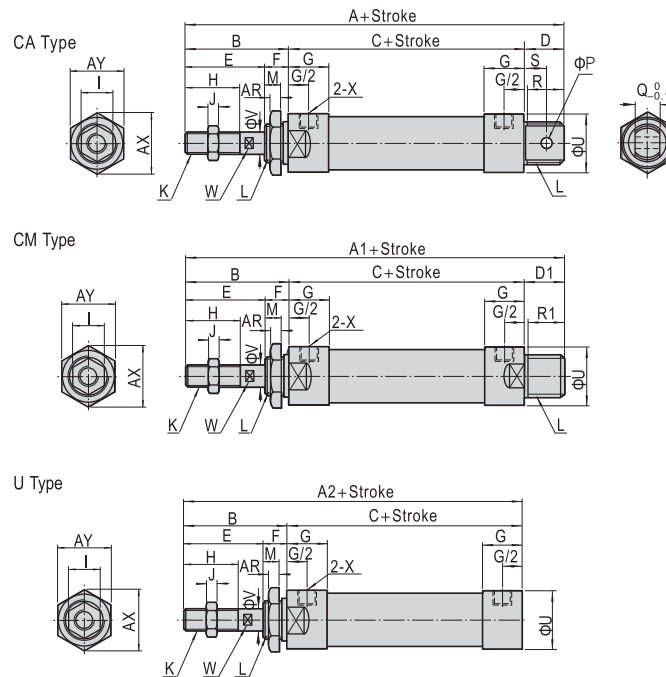


Bore size\Item	A	A1	A2	B	C	D	D1	E	F	G	H	I	J	K
20	131	122	110	40	70	21	12	28	12	16	20	12	6	M8 × 1.25
25	135	128	114	44	70	21	14	30	14	16	22	17	6	M10 × 1.25
32	141	128	114	44	70	27	14	30	14	16	22	17	6	M10 × 1.25
40	165	152	138	46	92	27	14	32	14	22	24	17	7	M12 × 1.25

Bore size\Item	L	M	P	Q	R	R1	S	U	V	W	X	AR	AX	AY
20	M22 × 1.5	10	8	16	19	10	12	29	8	6	1/8"	7	33	29
25	M22 × 1.5	12	8	16	19	12	12	34	10	8	1/8"	7	33	29
32	M24 × 2.0	12	10	16	25	12	15	39.5	12	10	1/8"	8	37	32
40	M30 × 2.0	12	12	20	25	12	15	49.5	16	14	1/4"	9	47	41

Remark: The dimensions of magnet type cylinder are the same as non-magnet type cylinder.

MSAL

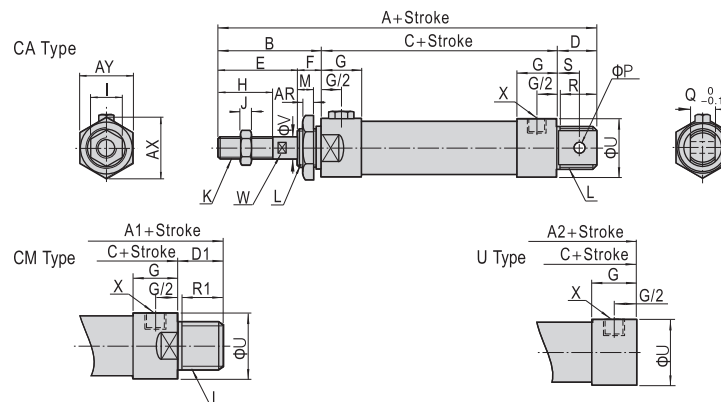

Item	A			A1			A2			B	C			D	D1	E	F
	≤50	51~100	≥101	≤50	51~100	≥101	≤50	51~100	≥101		≤50	51~100	≥101				
20	156	181	206	147	172	197	135	160	185	40	95	120	145	21	12	28	12
25	160	185	210	153	178	203	139	164	189	44	95	120	145	21	14	30	14
32	166	191	216	153	178	203	139	164	189	44	95	120	145	27	14	30	14
40	190	215	240	177	202	227	163	188	213	46	117	142	167	27	14	32	14

Bore size\Item	G	H	I	J	K	L	M	P	Q	R	R1	S	U	V	W	X	AR	AX	AY
20	16	20	12	6	M8 × 1.25	M22 × 1.5	10	8	16	19	10	12	29	8	6	1/8"	7	33	29
25	16	22	17	6	M10 × 1.25	M22 × 1.5	12	8	16	19	12	12	34	10	8	1/8"	7	33	29
32	16	22	17	6	M10 × 1.25	M24 × 2.0	12	10	16	25	12	15	39.5	12	10	1/8"	8	37	32
40	22	24	17	7	M12 × 1.25	M30 × 2.0	12	12	20	25	12	15	49.5	16	14	1/4"	9	47	41

Remark: The dimensions of magnet type cylinder are the same as non-magnet type cylinder.




MAL

Mini cylinder(Aluminum barrel)



MAL Series

MTAL

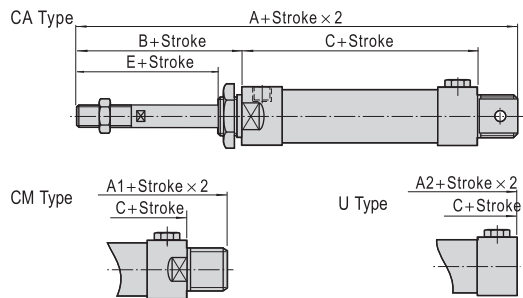


Item	A				A1				A2				C			
Bore size\Stroke	0~25	26~50	51~75	76~100	0~25	26~50	51~75	76~100	0~25	26~50	51~75	76~100	0~25	26~50	51~75	76~100
20	146	156	171	181	137	147	162	172	125	135	150	160	85	95	110	120
25	150	160	175	185	143	153	168	178	129	139	154	164	85	95	110	120
32	156	166	186	196	143	153	173	183	129	139	159	169	85	95	115	125
40	180	190	210	220	167	177	197	207	153	163	183	193	107	117	137	147

Remark:

1. The dimensions of magnet type cylinder are the same as non-magnet type cylinder.
2. The unmarked dimension is the same as MAL standard type.

MAL


MALD

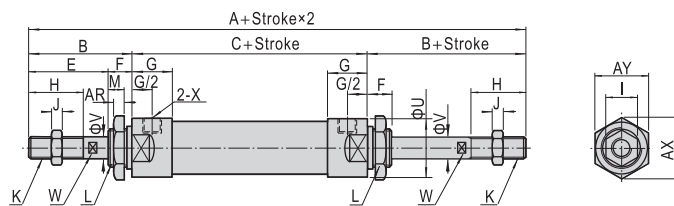

Bore size\Item	A	B	C	E	F	G	H	I	J	K	L	M	U	V	W	X	AR	AX	AY
20	150	40	70	28	12	16	20	12	6	M8 × 1.25	M22 × 1.5	10	29	8	6	1/8"	7	33	29
25	158	44	70	30	14	16	22	17	6	M10 × 1.25	M22 × 1.5	12	34	10	8	1/8"	7	33	29
32	158	44	70	30	14	16	22	17	6	M10 × 1.25	M24 × 2.0	12	39.5	12	10	1/8"	8	37	32
40	184	46	92	32	14	22	24	17	7	M12 × 1.25	M30 × 2.0	12	49.5	16	14	1/4"	9	47	41

Remark: The dimensions of magnet type cylinder are the same as non-magnet type cylinder.

MALJ

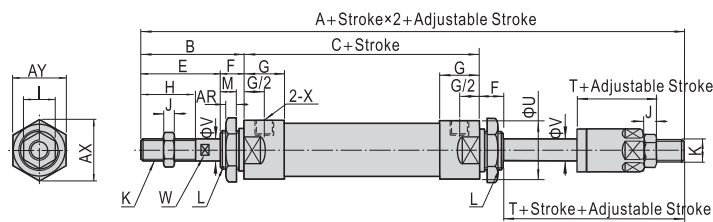

Bore size\Item	A	B	C	E	F	G	H	I	J	K	L	M	T	U	V	W	X	AR	AX	AY
20	147	40	70	28	12	16	20	12	6	M8 × 1.25	M22 × 1.5	10	25	29	8	6	1/8"	7	33	29
25	155	44	70	30	14	16	22	17	6	M10 × 1.25	M22 × 1.5	12	27	34	10	8	1/8"	7	33	29
32	155	44	70	30	14	16	22	17	6	M10 × 1.25	M24 × 2.0	12	27	39.5	12	10	1/8"	8	37	32
40	180	46	92	32	14	22	24	17	7	M12 × 1.25	M30 × 2.0	12	28	49.5	16	14	1/4"	9	47	41

Remark: The dimensions of magnet type cylinder are the same as non-magnet type cylinder.



Mini cylinder(Aluminum barrel)



Accessories

Ordering code

Accessories of MAL series cylinder are the same with that of MA series.
Please see accessory list for detail of selection and order information.

Accessory selection

Cylinder model	MAL		MSAL, MTAL		MALD, MALJ	
	Standard	With magnet	Standard	With magnet	Standard	With magnet
Mounting accessory	LB	●	●	●	●	●
	FA	●	●	●	●	●
	SDB	●	●	●	×	×
Knuckle ①	I	●	●	●	●	●
	Y	●	●	●	●	●
	U	●	●	●	●	●
	F	●	●	●	●	●
Sensor switch ②	CS1-M	×	●	×	●	×
	DS1-M	×	●	×	●	×

① Please refer to P397-402 for knuckle detail.

② Please refer to P403-426 for detail of sensor switch.

Material of accessories selection

Accessories	Mounting accessories			Knuckle			
	LB	FA	SDB	I	Y	F	U
Bore size	LB	FA	SDB	I	Y	F	U
16-63	○	○	○	□	□	□	□

○—Low carbon steel, □—Carbon steel.


List for ordering code of accessories

Accessories	Mounting accessory		
	LB	FA	SDB
Bore size	LB	FA	SDB
20	F-MA20LB	F-MA20FA	F-MA20SDB
25	F-MA25LB	F-MA25FA	F-MA25SDB
32	F-MA32LB	F-MA32FA	F-MA32SDB
40	F-MA40LB	F-MA40FA	F-MA40SDB

Accessories	Knuckle			
	I: I Knuckle	Y: Y Knuckle	F: F Knuckle	U: U Knuckle
Bore size	I: I Knuckle	Y: Y Knuckle	F: F Knuckle	U: U Knuckle
20	F-M08125I	F-M08125Y	F-M08125F	F-M08125U
25	F-M10125I	F-M10125Y	F-M10125F	F-M10125U
32	F-M12125I	F-M12125Y	F-M12125F	F-M12125U
40	F-M12125IA	F-M12125YA	F-M12125FA	F-M12125UA

Accessories	Sensor switch	
	CS1-M	DS1-M
Bore size	CS1-M	DS1-M
20	CS1-M-A20	DS1-M-A20
25	CS1-M-A25	DS1-M-A25
32	CS1-M-A32	DS1-M-A32
40	CS1-M-A40	DS1-M-A40


Dimensions

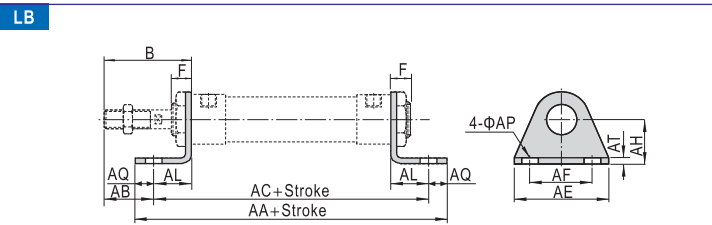

Bore size\Item	AA		AA(MSAL)			AC		AC(MSAL)	
	(MAL)	0-50	51-100	101-150	(MAL)	0-50	51-100	101-150	
Stroke	116	141	166	191	100	125	150	175	
20	116	141	166	191	100	125	150	175	
25	116	141	166	191	100	125	150	175	
32	136	161	186	211	120	145	170	195	
40	158	183	208	233	142	167	192	217	


Bore size\Item	B	F	AB	AE	AF	AL	AQ	AP	AT	AH
	20	40	12	25	54	40	15	8	6.5	3
25	44	14	29	54	40	15	8	6.5	3	25
32	44	14	19	59	45	25	8	6.5	4	32
40	46	14	21	64	50	25	8	6.5	4	36

FA

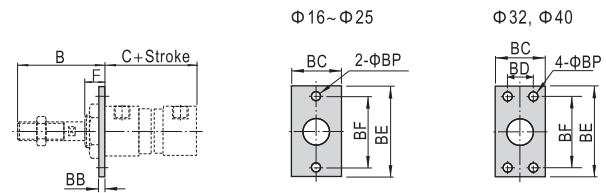

Bore size\Item	Stroke	B	C			BB	BC	BD	BE	BF	BP	F
		(MAL)	0-50	51-100	101-150							
20	40	70	95	120	145	4	38	-	64	50	6.5	12
25	44	70	95	120	145	4	38	-	64	50	6.5	14
32	44	70	95	120	145	4	47	33	72	58	6.5	14
40	46	92	117	142	167	4	50	36	84	70	6.5	14

SDB

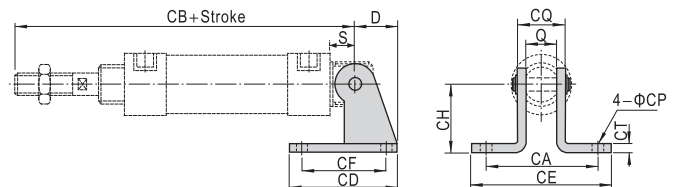

Bore size\Item	Stroke	D	S	Q	CA	CB			CD	CE	CF	CH	CT	CP	CQ
						(MAL)	0-50	51-100							
20	21	12	16	51	122	147	172	197	48	67	32	32	3	6.5	22
25	21	12	16	51	126	151	176	201	48	67	32	32	3	6.5	22
32	27	15	16	51	129	154	179	204	52	67	36	36	4	6.5	24
40	27	15	20	55	153	178	203	228	56	71	40	40	4	6.5	28



MAL

