


HUMPHREY DUAL CYLINDERS

DOUBLE ACTING, SINGLE ACTING-PUSH AND SINGLE ACTING-PULL TYPES

SYMBOLS


Double Acting (HJDAS)



Single Acting-Push (HJSAW)



Single Acting-Pull (HJTAW)



SPECIFICATIONS

Item	Nominal bore size inch (mm)										
	1/2 (12)	5/8 (16)	3/4 (20)	1 (25)	1 1/4 (32)	1 1/2 (40)	2 (50)	2 1/2 (63)	3 1/4 (80)	4 (100)	
Operation	All double & single acting types							All double acting types			
Media	Air										
Pressure - PSI (kgf/cm ²)	30 ~ 100 (2 ~ 7)		20 ~ 100 (1.5 ~ 7)			15 ~ 100 (1 ~ 7)					
Temperature °F (°C)	32 ~ 140 (0 ~ 60)										
Operating speeds in./sec. (mm/sec.)	Double	1 ~ 20 (30 ~ 500)			1 ~ 13.5 (30 ~ 350)			1 ~ 10 (30 ~ 250)			
	Single	4 ~ 20 (100 ~ 500)					-				
Bumpers	Double	Not available				Optional					
	Single	Not available				-					
Lubrication	Not required										
Port size	10 ~ 32			1/8 NPT		1/4 NPT		3/8 NPT			

NOTE: Refer to page 62 for mounting and handling information.

WEIGHT oz. (gf)

Bore nominal (mm)	Base weight				Additional weights to base		
	Double acting type	Single acting types		Stroke 1 or 2 per 1/4"	Sensor		
		push	pull		Double	Single	
1/2 (12)	2.6 (75)	3.4 (97.5)	3.4 (95.5)	.3 (8.3)	.21 (6)	.19 (5.5)	
5/8 (16)	3.4 (96)	3.7 (103.5)	3.8 (108)	.4 (11.4)	.35 (10)	.35 (10)	
3/4 (20)	4.5 (128)	4.9 (137.5)	5.1 (143.5)	.5 (15.2)	.46 (13)	.46 (13)	
1 (25)	6.4 (181)	7.0 (199)	7.0 (198)	.7 (21)	1.16 (33)	1.16 (33)	
1 1/4 (32)	9.6 (273)	9.5 (269)	10.9 (310)	.9 (24.8)	1.73 (49)	1.69 (48)	
1 1/2 (40)	14.2 (402)	14.2 (404)	14.2 (404)	1.3 (35.6)	3.88 (110)	3.88 (110)	
2 (50)	22.9 (648)	23.1 (654)	23 (652)	1.7 (48.3)	6.88 (195)	6.88 (195)	
2 1/2 (63)	32.2 (914)	-	-	2.1 (59.1)	9.13 (259)	-	
3 1/4 (80)	61.4 (1740)	-	-	3.2 (91.4)	13.72 (389)	-	
4 (100)	110.8 (3142)	-	-	4.6 (129.5)	25.11 (712)	-	

SENSOR SWITCHES (WITH BRACKET)

Model	oz. (gf)
CS9HA-HJDAS	1.41 (40)
CS3HA-HJDAS	1.06 (30)
CS4HA-HJDAS	1.06 (30)
CS5HA-HJDAS	1.06 (30)

COMPUTATION EXAMPLE (in oz.)

Double acting 1" (25mm) bore with magnet.


Stroke 1 = 1", Stroke 2 = 1/4", with four CS3HA-HJDAS mounted.

$$6.4 + (.7 \times 4) + (.7 \times 1) + 1.16 + (1.06 \times 4) = 15.3 \text{ oz. (439mm).}$$

PRINCIPLE OF OPERATION

The dual cylinder is constructed of two cylinders connected "back to back."

When mounting via the cylinder body, both strokes can be controlled separately. When mounting via one rod end, a two-step stroke action can be obtained.



BORES AND STROKES


Operation	Nominal bore in. (mm)	Standard Strokes - in.		Maximum stroke
		w/o magnet	w/magnet	
Double	1/2 (12)	1/4, 3/8, 1/2, 5/8, 3/4, 1, 1 1/4	1/2, 5/8, 3/4, 1, 1 1/4	1 1/4
	5/8 (16)			
	3/4 (20)			
	1 (25)	1/4, 1/2, 3/4, 1, 1 1/4, 1 1/2, 2	1/2, 3/4, 1, 1 1/4, 1 1/2, 2	2
	1 1/4 (32)			
	1 1/2 (40)	1/4, 3/8, 1/2, 5/8, 3/4, 1, 1 1/4, 1 1/2, 2, 3, 4	1/2, 5/8, 3/4, 1, 1 1/4, 1 1/2, 2, 3, 4	4
2 (50)	1/2, 3/4, 1, 1 1/4, 1 1/2, 2, 3, 4	1/2, 3/4, 1, 1 1/4, 1 1/2, 2, 3, 4	4	
2 1/2 (63)				
3 1/4 (80)				
4 (100)				
Single	1/2 (12)	1/4, 3/8, 1/2, 5/8, 3/4, 1, 1 1/4	1/2, 5/8, 3/4, 1	1 1/4
	5/8 (16)			
	3/4 (20)			
	1 (25)	1/4, 1/2, 3/4, 1, 1 1/4	1/2, 3/4, 1, 1 1/4	1 1/4
	1 1/4 (32)			
	1 1/2 (40)	1/4, 3/8, 1/2, 5/8, 3/4, 1, 1 1/4	1/2, 5/8, 3/4, 1, 1 1/4	1 1/4
2 (50)	1/2, 3/4, 1, 1 1/4, 1 1/2	1/2, 3/4, 1, 1 1/4, 1 1/2	1 1/2	

NOTES:


See page 62 for non-standard strokes.

Stroke tolerance: +.040"/-.000".

The chart applies to both stroke 1 and stroke 2.




HOW TO ORDER INFORMATION

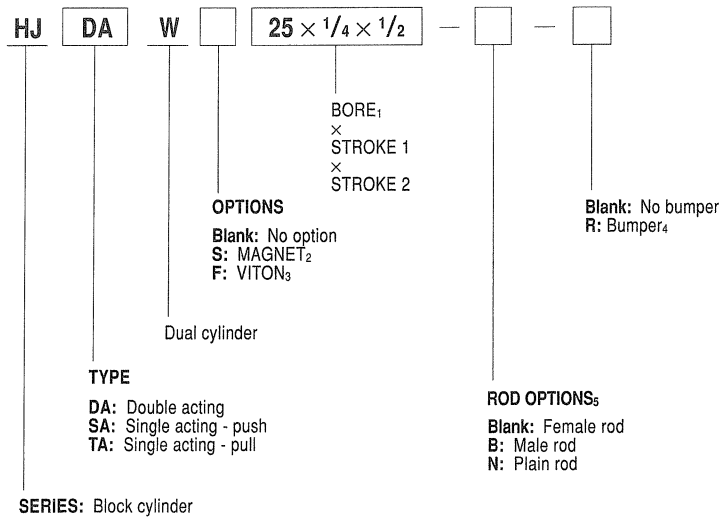


NOTE: Ordering strokes over 1", use: / / . Examples: 1" 1/4, 2" 1/8.
 NOTE 1: When ordering bore size, specify by using actual mm bore size.
 NOTE 2: Refer to page 58 for sensor switch selection and information.
 NOTE 3: Viton option not available with Magnet (S) and Bumper (R) options.
 NOTE 4: Bumper option only available in bore sizes 1 1/2 (40) thru 4 (100).
 NOTE 5: Rod end specification applies to both rod ends. Refer to page 52 for male rod thread (B) and plain rod (N) information. Rod nuts sold separately.

INNER CONSTRUCTION AND MAJOR PARTS


Double acting (HJDAW)

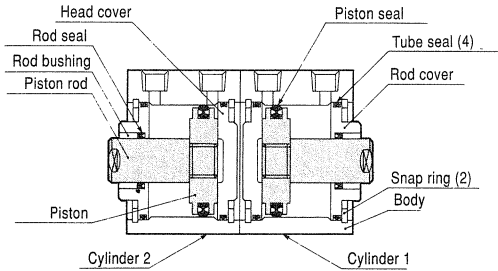


Single acting – push (HJSAW)

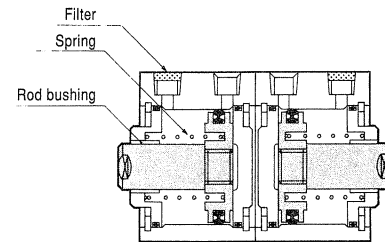

Single acting – pull (HJTAW)

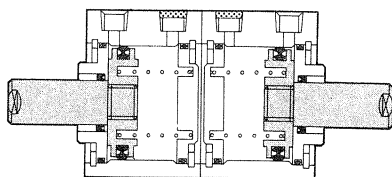

Magnet/sensor option

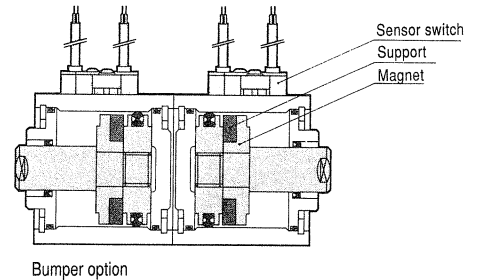



MATERIALS OF MAJOR PARTS

Item	Nominal bore size inch (mm)									
	1/2 (12)	5/8 (16)	3/4 (20)	1 (25)	1 1/4 (32)	1 1/2 (40)	2 (50)	2 1/2 (63)	3 1/4 (80)	4 (100)
Body	Aluminum (anodized)									
Piston	Stainless steel			Aluminum (anodized) ¹						
Piston rod	Stainless steel				Hard steel (chrome plated) ¹					
Seals (piston, rod, tube)	Buna N standard (viton option)									
Rod bushing	None			Double act. – oil permeated bronze, single act. – bronze						
Rod cover	Phosphorous bronze			Aluminum (anodized)						
Head cover	Aluminum (anodized)									
Snap ring	Hard steel									
Spacer	Aluminum (anodized)									
Spring	Music wire							–		
Filter	Porous aluminum							–		
Magnet	Resinous magnet									
Support	Aluminum (anodized)									
Bumper	Buna N									

NOTE 1: Piston and piston rod are stainless steel for 1" (25) bore size with Magnet (S) type.



DOUBLE ACTING (HJDAW)
 DOUBLE ACTING WITH MAGNET (HJDAYS)

Bores 1/2 (12) & 5/8 (16)

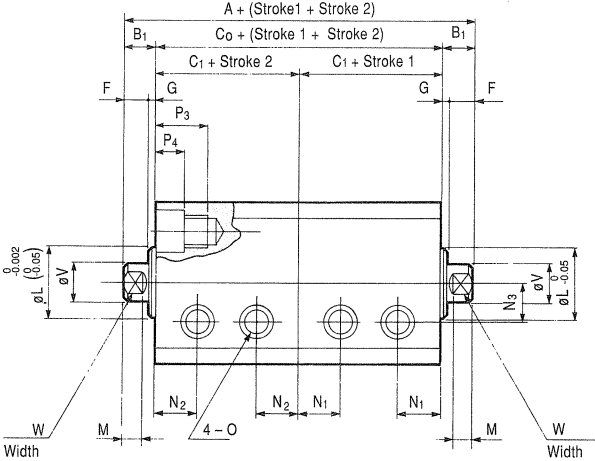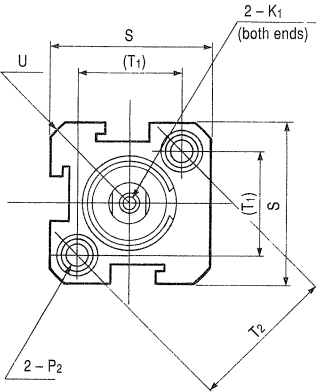

1/2 (12) bore is shown above. Refer to page 62 for non-standard strokes.

Bores 3/4 (20) thru 4 (100)

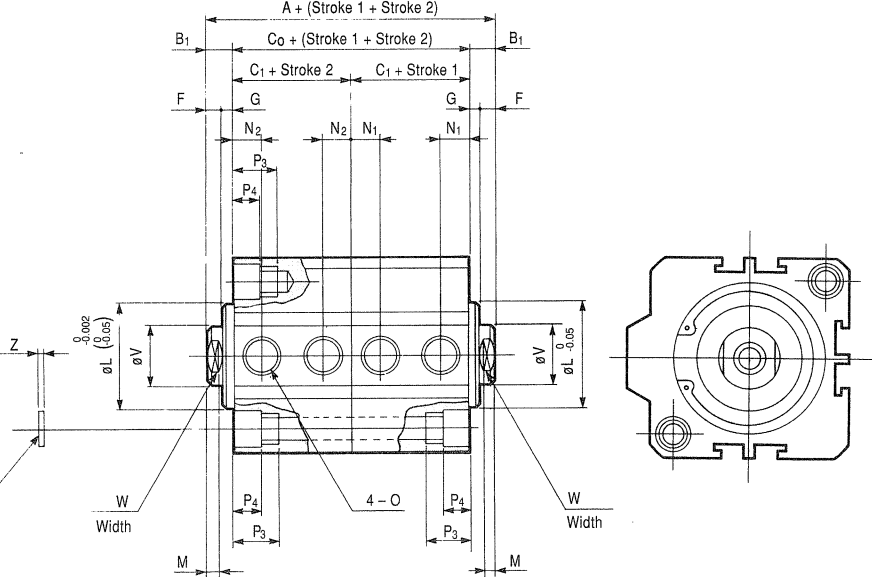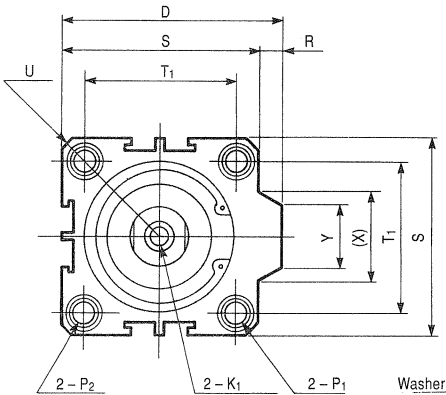

Refer to page 62 for non-standard strokes.

Bore Nominal in. (mm)	Dimension – inch (mm)										
	HJDAW (without magnet)				HJDAWS (with magnet)				D	F	G
	A	B ₁	C ₀	C ₁	A	B ₁	C ₀	C ₁			
1/2 (12)	1.732 (44)	.197 (5)	1.339 (34)	.669 (17)	2.032 (51.6)	.197 (5)	1.835 (46.6)	.918 (23.3)	–	.157 (4)	.039 (1)
5/8 (16)	1.890 (48)	.217 (5.5)	1.457 (37)	.729 (18.5)	2.666 (67.7)	.217 (5.5)	2.449 (62.2)	1.224 (31.1)	–	.157 (4)	.059 (1.5)
3/4 (20)	1.969 (50)	.217 (5.5)	1.535 (39)	.768 (19.5)	2.500 (63.5)	.217 (5.5)	2.283 (58)	1.142 (29)	1.417 (36)	.157 (4)	.059 (1.5)
1 (25)	2.126 (54)	.236 (6)	1.656 (42)	.827 (21)	2.638 (67)	.236 (6)	2.402 (61)	1.201 (30.5)	1.654 (42)	.157 (4)	.079 (2)
1 1/4 (32)	2.480 (63)	.276 (7)	1.929 (49)	.965 (24.5)	2.953 (75)	.276 (7)	2.677 (68)	1.339 (34)	1.969 (50)	.157 (4)	.118 (3)
1 1/2 (40)	2.598 (66)	.276 (7)	2.047 (52)	1.024 (26)	3.071 (78)	.276 (7)	2.795 (71)	1.398 (35.5)	2.303 (58.5)	.157 (4)	.118 (3)
2 (50)	2.913 (74)	.354 (9)	2.205 (56)	1.102 (28)	3.307 (84)	.354 (9)	2.953 (75)	1.477 (37.5)	2.815 (71.5)	.197 (5)	.157 (4)
2 1/2 (63)	3.228 (82)	.354 (9)	2.520 (64)	1.260 (32)	3.622 (92)	.354 (9)	3.268 (83)	1.634 (41.5)	3.327 (84.5)	.197 (5)	.157 (4)
3 1/4 (80)	4.197 (106.6)	.433 (11)	3.331 (84.6)	1.665 (42.3)	4.512 (114.6)	.433 (11)	4.079 (103.6)	2.039 (51.8)	4.094 (104)	.236 (6)	.197 (5)
4 (100)	5.063 (128.6)	.472 (12)	4.118 (104.6)	2.059 (52.3)	5.339 (135.6)	.472 (12)	4.866 (123.6)	2.433 (61.8)	4.882 (124)	.276 (7)	.197 (5)

Bore Nominal in. (mm)	Dimension – inch (mm)								
	K ₁	L	M	N ₁ /N ₂	N ₃	O	P ₁ – thru hole x C bore x thru hole thread	P ₃	P ₄
1/2 (12)	4-40 UNC x .236 (6) dp.	.433 (11)	.118 (3)	.256 (6.5)	.236 (6)	10-32	.138 (3.5) x .256 (6.5) x 10-32 UNF	.374 (9.5)	.177 (4.5)
5/8 (16)	4-40 UNC x .236 (6) dp.	.433 (11)	.118 (3)	.276 (7)	.236 (6)	10-32	.138 (3.5) x .256 (6.5) x 10-32 UNF	.374 (9.5)	.177 (4.5)
3/4 (20)	8-32 UNC x .315 (8) dp.	.591 (15)	.118 (3)	.296 (7.5)	–	10-32	.138 (3.5) x .256 (6.5) x 10-32 UNF	.374 (9.5)	.177 (4.5)
1 (25)	10-32 UNF x .394 (10) dp.	.669 (17)	.118 (3)	.315 (8)	–	10-32	.181 (4.6) x .315 (8) x 1/4-20 UNC	.453 (11.5)	.217 (5.5)
1 1/4 (32)	1/4-20 UNC x .472 (12) dp.	.866 (22)	.118 (3)	.354 (9)*	–	1/8 NPT	.181 (4.6) x .315 (8) x 1/4-20 UNC	.453 (11.5)	.217 (5.5)
1 1/2 (40)	5/16-18 UNC x .472 (12) dp.	1.102 (28)	.118 (3)	.394 (10)*	–	1/8 NPT	.225 (5.7) x .374 (9.5) x 5/16-18 UNC	.611 (15.5)	.296 (7.5)
2 (50)	3/8-16 UNC x .591 (15) dp.	1.496 (38)	.118 (3)	.394 (10)	–	1/4 NPT	.276 (7) x .433 (11) x 3/8-16 UNC	.650 (16.5)	.335 (8.5)
2 1/2 (63)	3/8-16 UNC x .591 (15) dp.	1.575 (40)	.118 (3)	.472 (12)	–	1/4 NPT	.276 (7) x .433 (11) x 3/8-16 UNC	.650 (16.5)	.335 (8.5)
3 1/4 (80)	1/2-13 UNC x .787 (20) dp.	1.772 (45)	.157 (4)	.492 (12.5)	–	3/8 NPT	.362 (9.2) x .551 (14) x 1/2-13 UNC	.886 (22.5)	.414 (10.5)
4 (100)	3/4-10 UNC x .787 (20) dp.	2.165 (55)	.157 (4)	.669 (17)	–	3/8 NPT	.445 (11.3) x .689 (17.5) x 1/2-13 UNC	1.063 (27)	.512 (13)

Bore Nominal in. (mm)	Dimension – inch (mm)									
	R	S	T ₁	T ₂	U (Radius)	V	W	X	Y	Z
1/2 (12)	–	.984 (25)	.638 (16.2)	.906 (23)	.630 (16)	.236 (6)	.197 (5)	–	–	.039 (1)
5/8 (16)	–	1.142 (29)	.779 (19.8)	1.102 (28)	.748 (19)	.236 (6)	.197 (5)	–	–	.039 (1)
3/4 (20)	.079 (2)	1.339 (34)	.945 (24)	–	.866 (22)	.315 (8)	.236 (6)	.484 (12.3)	.394 (10)	.039 (1)
1 (25)	.079 (2)	1.575 (40)	1.102 (28)	–	.984 (25)	.394 (10)	.315 (8)	.484 (12.3)	.394 (10)	.039 (1)
1 1/4 (32)	.236 (6)	1.732 (44)	1.339 (34)	–	1.162 (29.5)	.472 (12)	.394 (10)	.901 (22.9)	.630 (16)	.039 (1)
1 1/2 (40)	.256 (6.5)	2.047 (52)	1.575 (40)	–	1.378 (35)	.630 (16)	.551 (14)	.926 (23.5)	.630 (16)	.063 (1.6)
2 (50)	.374 (9.5)	2.441 (62)	1.890 (48)	–	1.614 (41)	.787 (20)	.669 (17)	1.220 (31)	.787 (20)	.063 (1.6)
2 1/2 (63)	.374 (9.5)	2.953 (75)	2.362 (60)	–	1.969 (50)	.787 (20)	.669 (17)	1.220 (31)	.787 (20)	.063 (1.6)
3 1/4 (80)	.394 (10)	3.701 (94)	2.913 (74)	–	2.441 (62)	.984 (25)	.866 (22)	1.477 (37.5)	1.024 (26)	.063 (1.6)
4 (100)	.394 (10)	4.488 (114)	3.543 (90)	–	2.953 (75)	1.260 (32)	1.063 (27)	1.477 (37.5)	1.024 (26)	.079 (2)

*Dimension is .276 (7) for 1 1/4 (32) bore with 1/4" stroke. Dimension is .287 (7.3) for 1 1/2 (40) bore with 1/4" stroke.



NOTE 1: Please refer to page 52 for male rod thread information.

NOTE 2: Plain rod is same as female rod end except no threads.

NOTE 3: Please refer to page 52 for sensor switch dimensional information.



SINGLE ACTING – PUSH (HJSAW)
 SINGLE ACTING – PUSH WITH MAGNET (HJSAWS)

Bores $\frac{1}{2}$ (12) & $\frac{5}{8}$ (16)

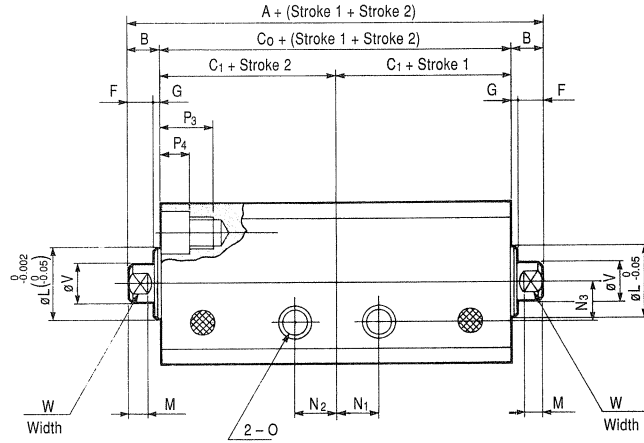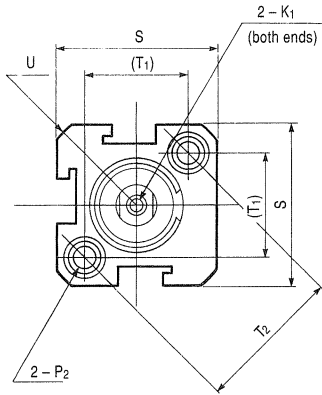

$\frac{1}{2}$ (12) bore is shown above. Refer to page 62 for non-standard strokes.

Bores $\frac{3}{4}$ (20) thru 2 (50)

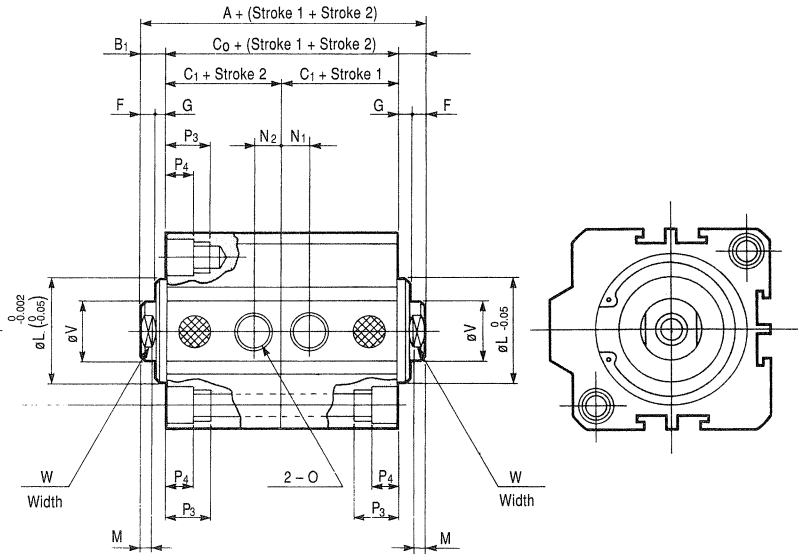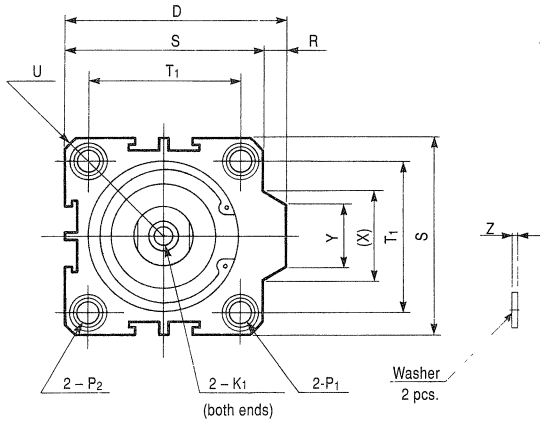

Refer to page 62 for non-standard strokes.

Bore Nominal in. (mm)	Dimension – inch (mm)										
	HJSAW (without magnet)				HJSAWS (with magnet)				D	F	G
	A	B ₁	C ₀	C ₁	A	B ₁	C ₀	C ₁			
1/2 (12)	2.031 (51.6)	.197 (5)	1.835 (46.6)	.917 (23.3)	2.528 (64.2)	.197 (5)	2.331 (59.2)	1.166 (29.6)	–	.157 (4)	.039 (1)
5/8 (16)	2.169 (55.1)	.217 (5.5)	1.953 (49.6)	.976 (24.8)	2.666 (67.7)	.217 (5.5)	2.449 (62.2)	1.224 (31.1)	–	.157 (4)	.059 (1.5)
3/4 (20)	1.969 (50)	.217 (5.5)	1.535 (39)	.768 (19.5)	2.500 (63.5)	.217 (5.5)	2.283 (58)	1.142 (29)	1.417 (36)	.157 (4)	.059 (1.5)
1 (25)	2.126 (54)	.236 (6)	1.656 (42)	.827 (21)	2.638 (67)	.236 (6)	2.402 (61)	1.201 (30.5)	1.654 (42)	.157 (4)	.079 (2)
1 1/4 (32)	2.480 (63)	.276 (7)	1.929 (49)	.965 (24.5)	2.953 (75)	.276 (7)	2.677 (68)	1.339 (34)	1.969 (50)	.157 (4)	.118 (3)
1 1/2 (40)	2.598 (66)	.276 (7)	2.047 (52)	1.024 (26)	3.071 (78)	.276 (7)	2.795 (71)	1.398 (35.5)	2.303 (58.5)	.157 (4)	.118 (3)
2 (50)	2.913 (74)	.354 (9)	2.205 (56)	1.102 (28)	3.307 (84)	.354 (9)	2.953 (75)	1.477 (37.5)	2.815 (71.5)	.197 (5)	.157 (4)

Bore Nominal in. (mm)	Dimension – inch (mm)								
	K ₁	L	M	N ₁ /N ₂	N ₃	O	P ₁ – thru hole x C bore x thru hole thread	P ₃	P ₄
1/2 (12)	4-40 UNC x .236 (6) dp.	.433 (11)	.118 (3)	.256 (6.5)	.236 (6)	10-32	.138 (3.5) x .256 (6.5) x 10-32 UNF	.374 (9.5)	.177 (4.5)
5/8 (16)	4-40 UNC x .236 (6) dp.	.433 (11)	.118 (3)	.276 (7)	.236 (6)	10-32	.138 (3.5) x .256 (6.5) x 10-32 UNF	.374 (9.5)	.177 (4.5)
3/4 (20)	8-32 UNC x .315 (8) dp.	.591 (15)	.118 (3)	.296 (7.5)	–	10-32	.138 (3.5) x .256 (6.5) x 10-32 UNF	.374 (9.5)	.177 (4.5)
1 (25)	10-32 UNF x .394 (10) dp.	.669 (17)	.118 (3)	.315 (8)	–	10-32	.181 (4.6) x .315 (8) x 1/4-20 UNC	.453 (11.5)	.217 (5.5)
1 1/4 (32)	1/4-20 UNC x .472 (12) dp.	.866 (22)	.118 (3)	.354 (9)*	–	1/8 NPT	.181 (4.6) x .315 (8) x 1/4-20 UNC	.453 (11.5)	.217 (5.5)
1 1/2 (40)	5/16-18 UNC x .472 (12) dp.	1.102 (28)	.118 (3)	.394 (10)*	–	1/8 NPT	.225 (5.7) x .374 (9.5) x 5/16-18 UNC	.611 (15.5)	.296 (7.5)
2 (50)	3/8-16 UNC x .591 (15) dp.	1.496 (38)	.118 (3)	.394 (10)	–	1/4 NPT	.276 (7) x .433 (11) x 3/8-16 UNC	.650 (16.5)	.335 (8.5)

Bore Nominal in. (mm)	Dimension – inch (mm)									
	R	S	T ₁	T ₂	U (Radius)	V	W	X	Y	Z
1/2 (12)	–	.984 (25)	.638 (16.2)	.906 (23)	.630 (16)	.236 (6)	.197 (5)	–	–	.039 (1)
5/8 (16)	–	1.142 (29)	.779 (19.8)	1.102 (28)	.748 (19)	.236 (6)	.197 (5)	–	–	.039 (1)
3/4 (20)	.079 (2)	1.339 (34)	.945 (24)	–	.866 (22)	.315 (8)	.236 (6)	.484 (12.3)	.394 (10)	.039 (1)
1 (25)	.079 (2)	1.575 (40)	1.102 (28)	–	.984 (25)	.394 (10)	.315 (8)	.484 (12.3)	.394 (10)	.039 (1)
1 1/4 (32)	.236 (6)	1.732 (44)	1.339 (34)	–	1.162 (29.5)	.472 (12)	.394 (10)	.901 (22.9)	.630 (16)	.039 (1)
1 1/2 (40)	.256 (6.5)	2.047 (52)	1.575 (40)	–	1.378 (35)	.630 (16)	.551 (14)	.926 (23.5)	.630 (16)	.063 (1.6)
2 (50)	.374 (9.5)	2.441 (62)	1.890 (48)	–	1.614 (41)	.787 (20)	.669 (17)	1.220 (31)	.787 (20)	.063 (1.6)

*Dimension is .276 (7) for 1 1/4 (32) bore with 1/4" stroke. Dimension is .287 (7.3) for 1 1/2 (40) bore with 1/4" stroke.



NOTE 1: Please refer to page 52 for male rod thread information.

NOTE 2: Plain rod is same as female rod end except no threads.

NOTE 3: Please refer to page 52 for sensor switch dimensional information.



SINGLE ACTING – PULL (HJTAW)
 SINGLE ACTING – PULL WITH MAGNET (HJTAWS)

Bores $1/2$ (12) & $5/8$ (16)

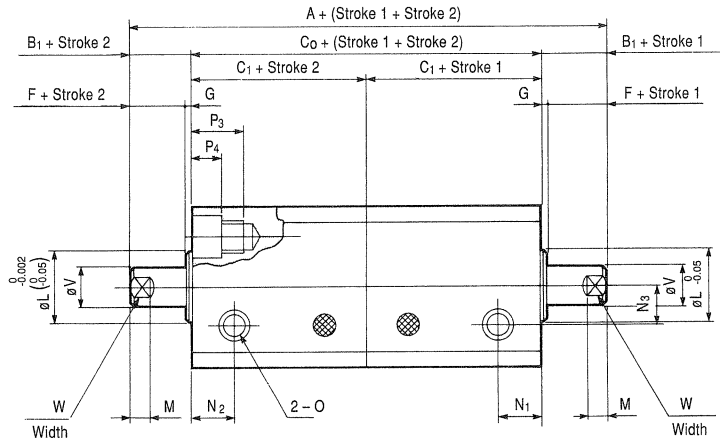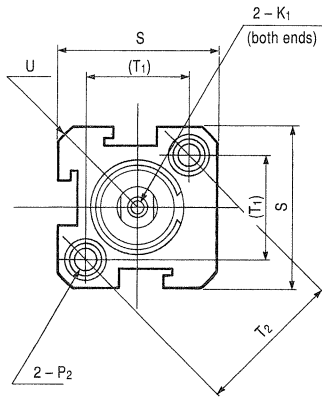

$1/2$ (12) bore is shown above. Refer to page 62 for non-standard strokes.

Bores $3/4$ (20) thru 2 (50)

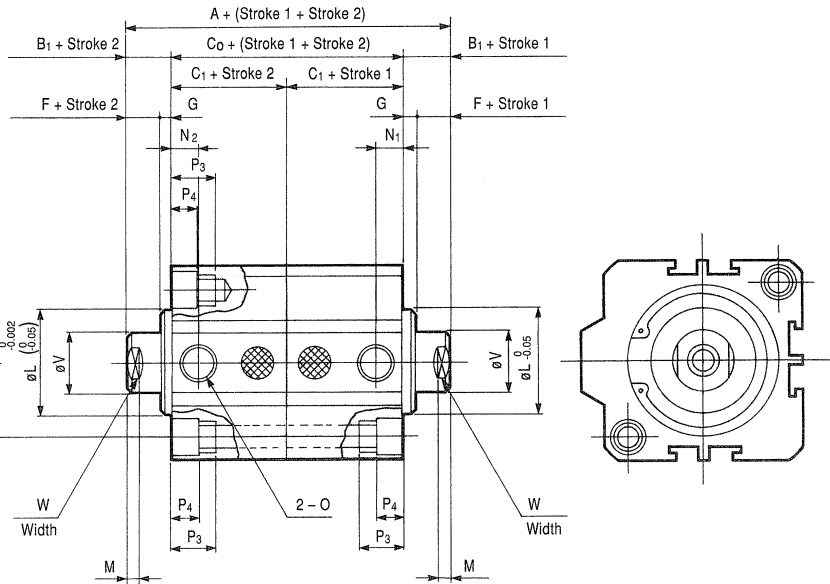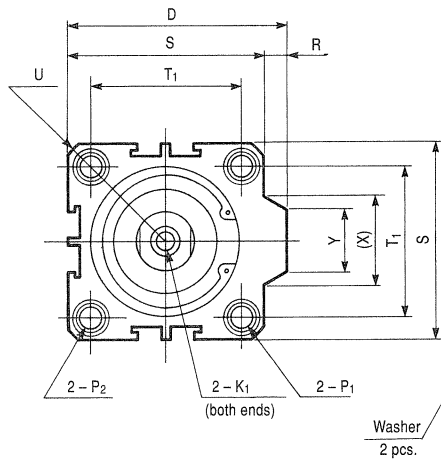

Refer to page 62 for non-standard stroke information.

Bore Nominal in. (mm)	Dimension – inch (mm)										
	HJTAW (without magnet)				HJTAWs (with magnet)				D	F	G
	A	B ₁	C ₀	C ₁	A	B ₁	C ₀	C ₁			
1/2 (12)	2.228 (56.6)	.197 (5)	1.835 (46.6)	.917 (23.3)	2.528 (64.2)	.197 (5)	2.331 (59.2)	1.166 (29.6)	–	.157 (4)	.039 (1)
5/8 (16)	2.169 (55.1)	.217 (5.5)	1.953 (49.6)	.976 (24.8)	2.666 (67.7)	.217 (5.5)	2.449 (62.2)	1.224 (31.1)	–	.157 (4)	.059 (1.5)
3/4 (20)	1.969 (50)	.217 (5.5)	1.535 (39)	.768 (19.5)	2.500 (63.5)	.217 (5.5)	2.283 (58)	1.142 (29)	1.417 (36)	.157 (4)	.059 (1.5)
1 (25)	2.126 (54)	.236 (6)	1.656 (42)	.827 (21)	2.638 (67)	.236 (6)	2.402 (61)	1.201 (30.5)	1.654 (42)	.157 (4)	.079 (2)
1 1/4 (32)	2.480 (63)	.276 (7)	1.929 (49)	.965 (24.5)	2.953 (75)	.276 (7)	2.677 (68)	1.339 (34)	1.969 (50)	.157 (4)	.118 (3)
1 1/2 (40)	2.598 (66)	.276 (7)	2.047 (52)	1.024 (26)	3.071 (78)	.276 (7)	2.795 (71)	1.398 (35.5)	2.303 (58.5)	.157 (4)	.118 (3)
2 (50)	2.913 (74)	.354 (9)	2.205 (56)	1.102 (28)	3.307 (84)	.354 (9)	2.953 (75)	1.477 (37.5)	2.815 (71.5)	.197 (5)	.157 (4)

Bore Nominal in. (mm)	Dimension – inch (mm)									
	K ₁	L	M	N ₁ /N ₂	N ₃	O	P ₁ – thru hole x C bore x thru hole thread	P ₃	P ₄	
1/2 (12)	4-40 UNC x .236 (6) dp.	.433 (11)	.118 (3)	.256 (6.5)	.236 (6)	10-32	.138 (3.5) x .256 (6.5) x 10-32 UNF	.374 (9.5)	.177 (4.5)	
5/8 (16)	4-40 UNC x .236 (6) dp.	.433 (11)	.118 (3)	.276 (7)	.236 (6)	10-32	.138 (3.5) x .256 (6.5) x 10-32 UNF	.374 (9.5)	.177 (4.5)	
3/4 (20)	8-32 UNC x .315 (8) dp.	.591 (15)	.118 (3)	.296 (7.5)	–	10-32	.138 (3.5) x .256 (6.5) x 10-32 UNF	.374 (9.5)	.177 (4.5)	
1 (25)	10-32 UNF x .394 (10) dp.	.669 (17)	.118 (3)	.315 (8)	–	10-32	.181 (4.6) x .315 (8) x 1/4-20 UNC	.453 (11.5)	.217 (5.5)	
1 1/4 (32)	1/4-20 UNC x .472 (12) dp.	.866 (22)	.118 (3)	.354 (9)*	–	1/8 NPT	.181 (4.6) x .315 (8) x 1/4-20 UNC	.453 (11.5)	.217 (5.5)	
1 1/2 (40)	5/16-18 UNC x .472 (12) dp.	1.102 (28)	.118 (3)	.394 (10)*	–	1/8 NPT	.225 (5.7) x .374 (9.5) x 5/16-18 UNC	.611 (15.5)	.296 (7.5)	
2 (50)	3/8-16 UNC x .591 (15) dp.	1.496 (38)	.118 (3)	.394 (10)	–	1/4 NPT	.276 (7) x .433 (11) x 3/8-16 UNC	.650 (16.5)	.335 (8.5)	

Bore Nominal in. (mm)	Dimension – inch (mm)									
	R	S	T ₁	T ₂	U (Radius)	V	W	X	Y	Z
1/2 (12)	–	.984 (25)	.638 (16.2)	.906 (23)	.630 (16)	.236 (6)	.197 (5)	–	–	.039 (1)
5/8 (16)	–	1.142 (29)	.779 (19.8)	1.102 (28)	.748 (19)	.236 (6)	.197 (5)	–	–	.039 (1)
3/4 (20)	.079 (2)	1.339 (34)	.945 (24)	–	.866 (22)	.315 (8)	.236 (6)	.484 (12.3)	.394 (10)	.039 (1)
1 (25)	.079 (2)	1.575 (40)	1.102 (28)	–	.984 (25)	.394 (10)	.315 (8)	.484 (12.3)	.394 (10)	.039 (1)
1 1/4 (32)	.236 (6)	1.732 (44)	1.339 (34)	–	1.162 (29.5)	.472 (12)	.394 (10)	.901 (22.9)	.630 (16)	.039 (1)
1 1/2 (40)	.256 (6.5)	2.047 (52)	1.575 (40)	–	1.378 (35)	.630 (16)	.551 (14)	.926 (23.5)	.630 (16)	.063 (1.6)
2 (50)	.374 (9.5)	2.441 (62)	1.890 (48)	–	1.614 (41)	.787 (20)	.669 (17)	1.220 (31)	.787 (20)	.063 (1.6)

*Dimension is .276 (7) for 1 1/4 (32) bore with 1/4" stroke. Dimension is .287 (7.3) for 1 1/2 (40) bore with 1/4" stroke.

NOTE 1: Please refer to page 52 for male rod thread information.

NOTE 2: Plain rod is same as female rod end except no threads.

NOTE 3: Please refer to page 52 for sensor switch dimensional information.