

VILP-32 HIGH VAC HIGH FLOW

AIR CONSUMPTION : 700 Nlit per min.

WORKING PRESSURE : 6 BAR.

MAX SUPPLY PRESSURE : 8 BAR.

MAX VACUUM : -0.9 BAR at 6 BAR,
at 5-6 BAR.


MAX VACUUM FLOW : 2100 lit per min.

WORKING TEMP. : -10°C + 100°C.

WEIGHT : 2800 g.

NOISE LEVEL : 72 db(A) at full flow.

MATERIALS : Epoxy painted AL, brass,
neoprene, stainless steel.

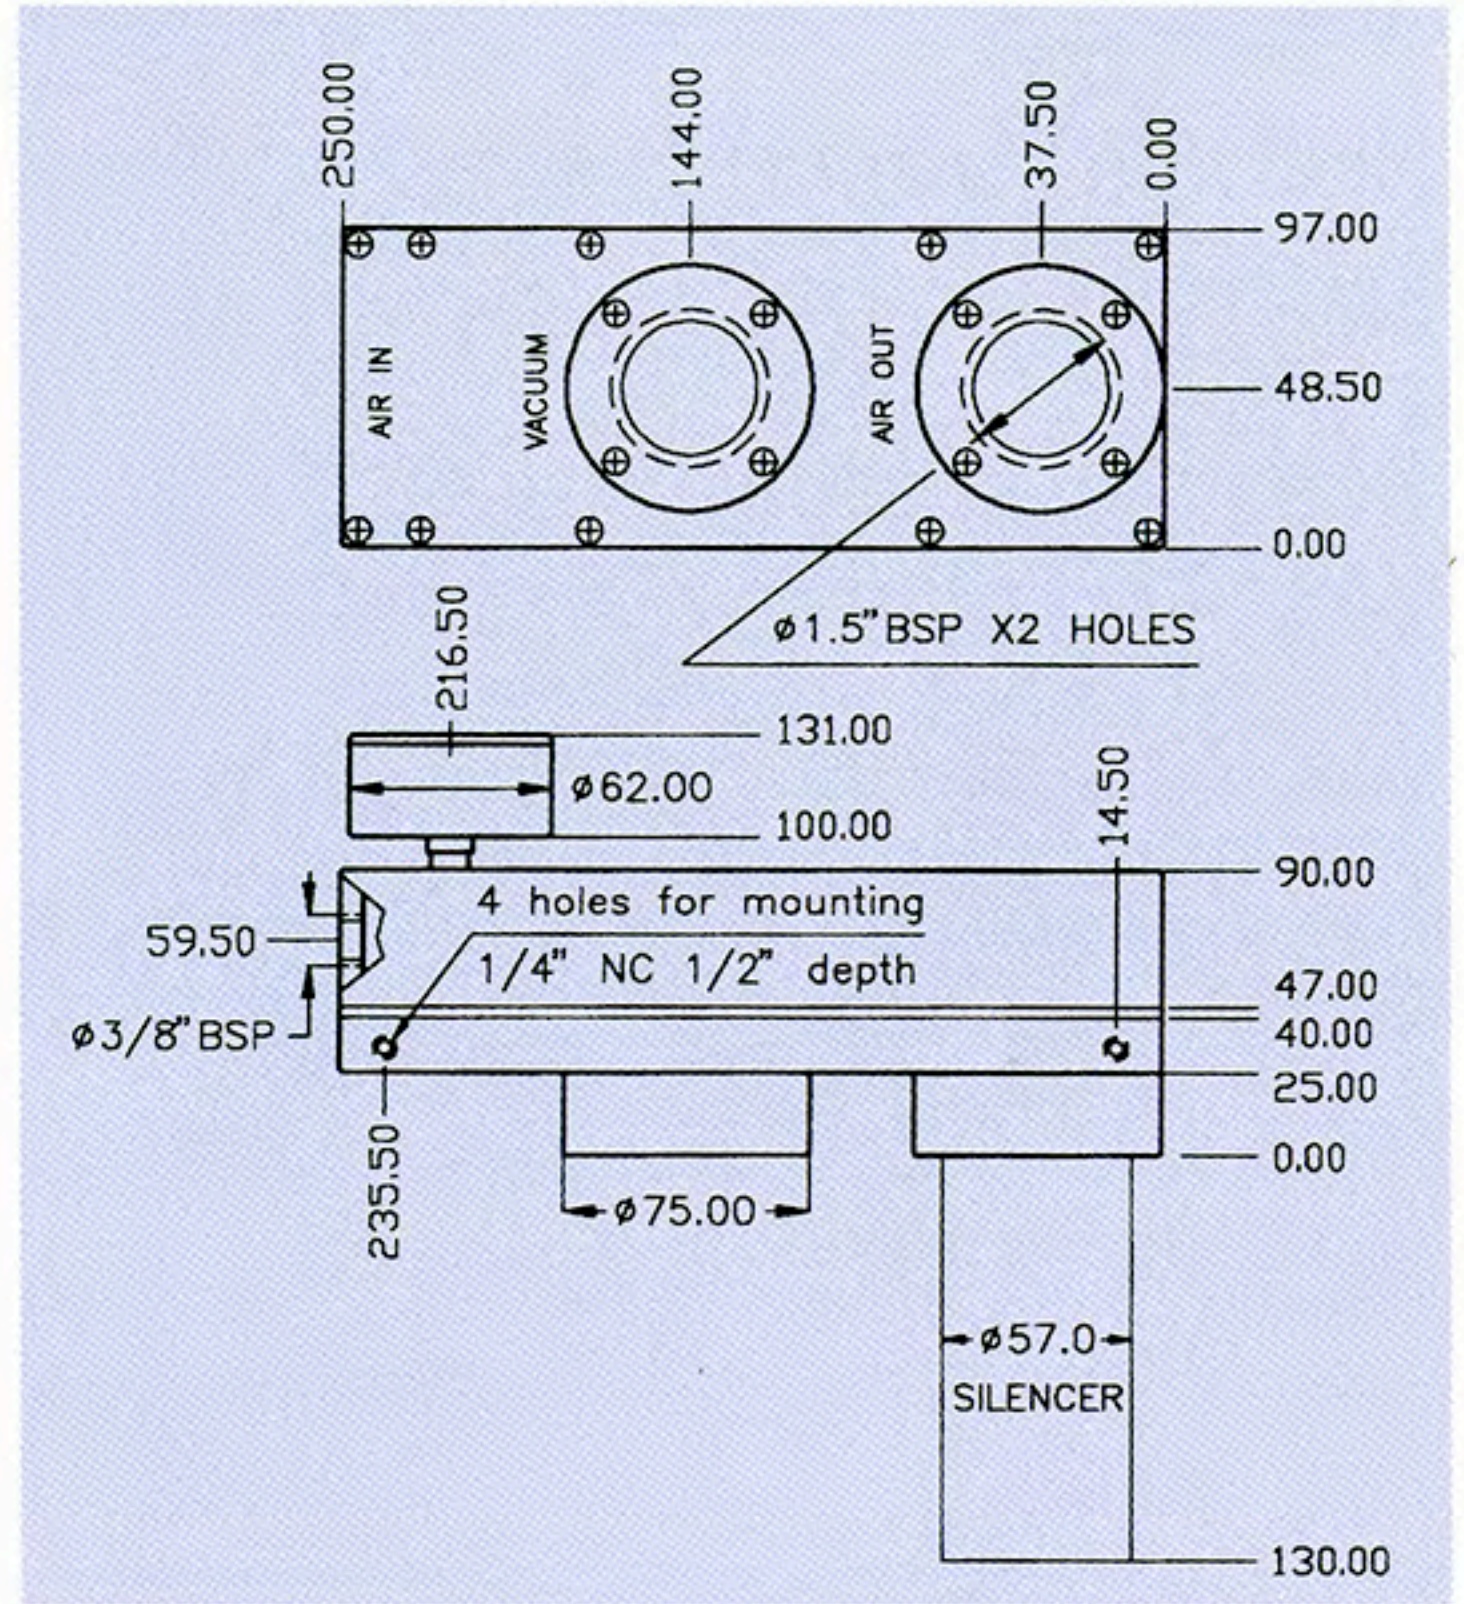

NOTE:

VILP Pumps are often used for high flow vacuum needs in porous materials, cartons, and pressed wood.

AIR AT 6 BAR

vacuum in - BAR	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
time in sec for evacuation of 1 lit to vac' level VILP - 32	0.003	0.005	0.01	0.03	0.05	0.08	0.13	0.23	0.85

vacuum in - BAR	0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
vacuum flow lit per min, at -ATM vacuum VILP - 32	2100	1500	980	520	360	300	215	140	84

