

VLP-128 LOW VACUUM PUMP

AIR CONSUMPTION : 2880 lit per min at 6 BAR.

WORKING PRESSURE : 4-6 BAR.

MAX SUPPLY PRESSURE : 7 BAR.

MAX VACUUM : -0.7 BAR at 5 BAR.


MAX VACUUM FLOW : 9600 lit per min.

WORKING TEMP. : -20°C + 80°C.

WEIGHT : 9500 g.

NOISE LEVEL : 72 db(A) at full vacuum.

MATERIALS : Epoxy painted AL, brass, neoprene, stainless steel.

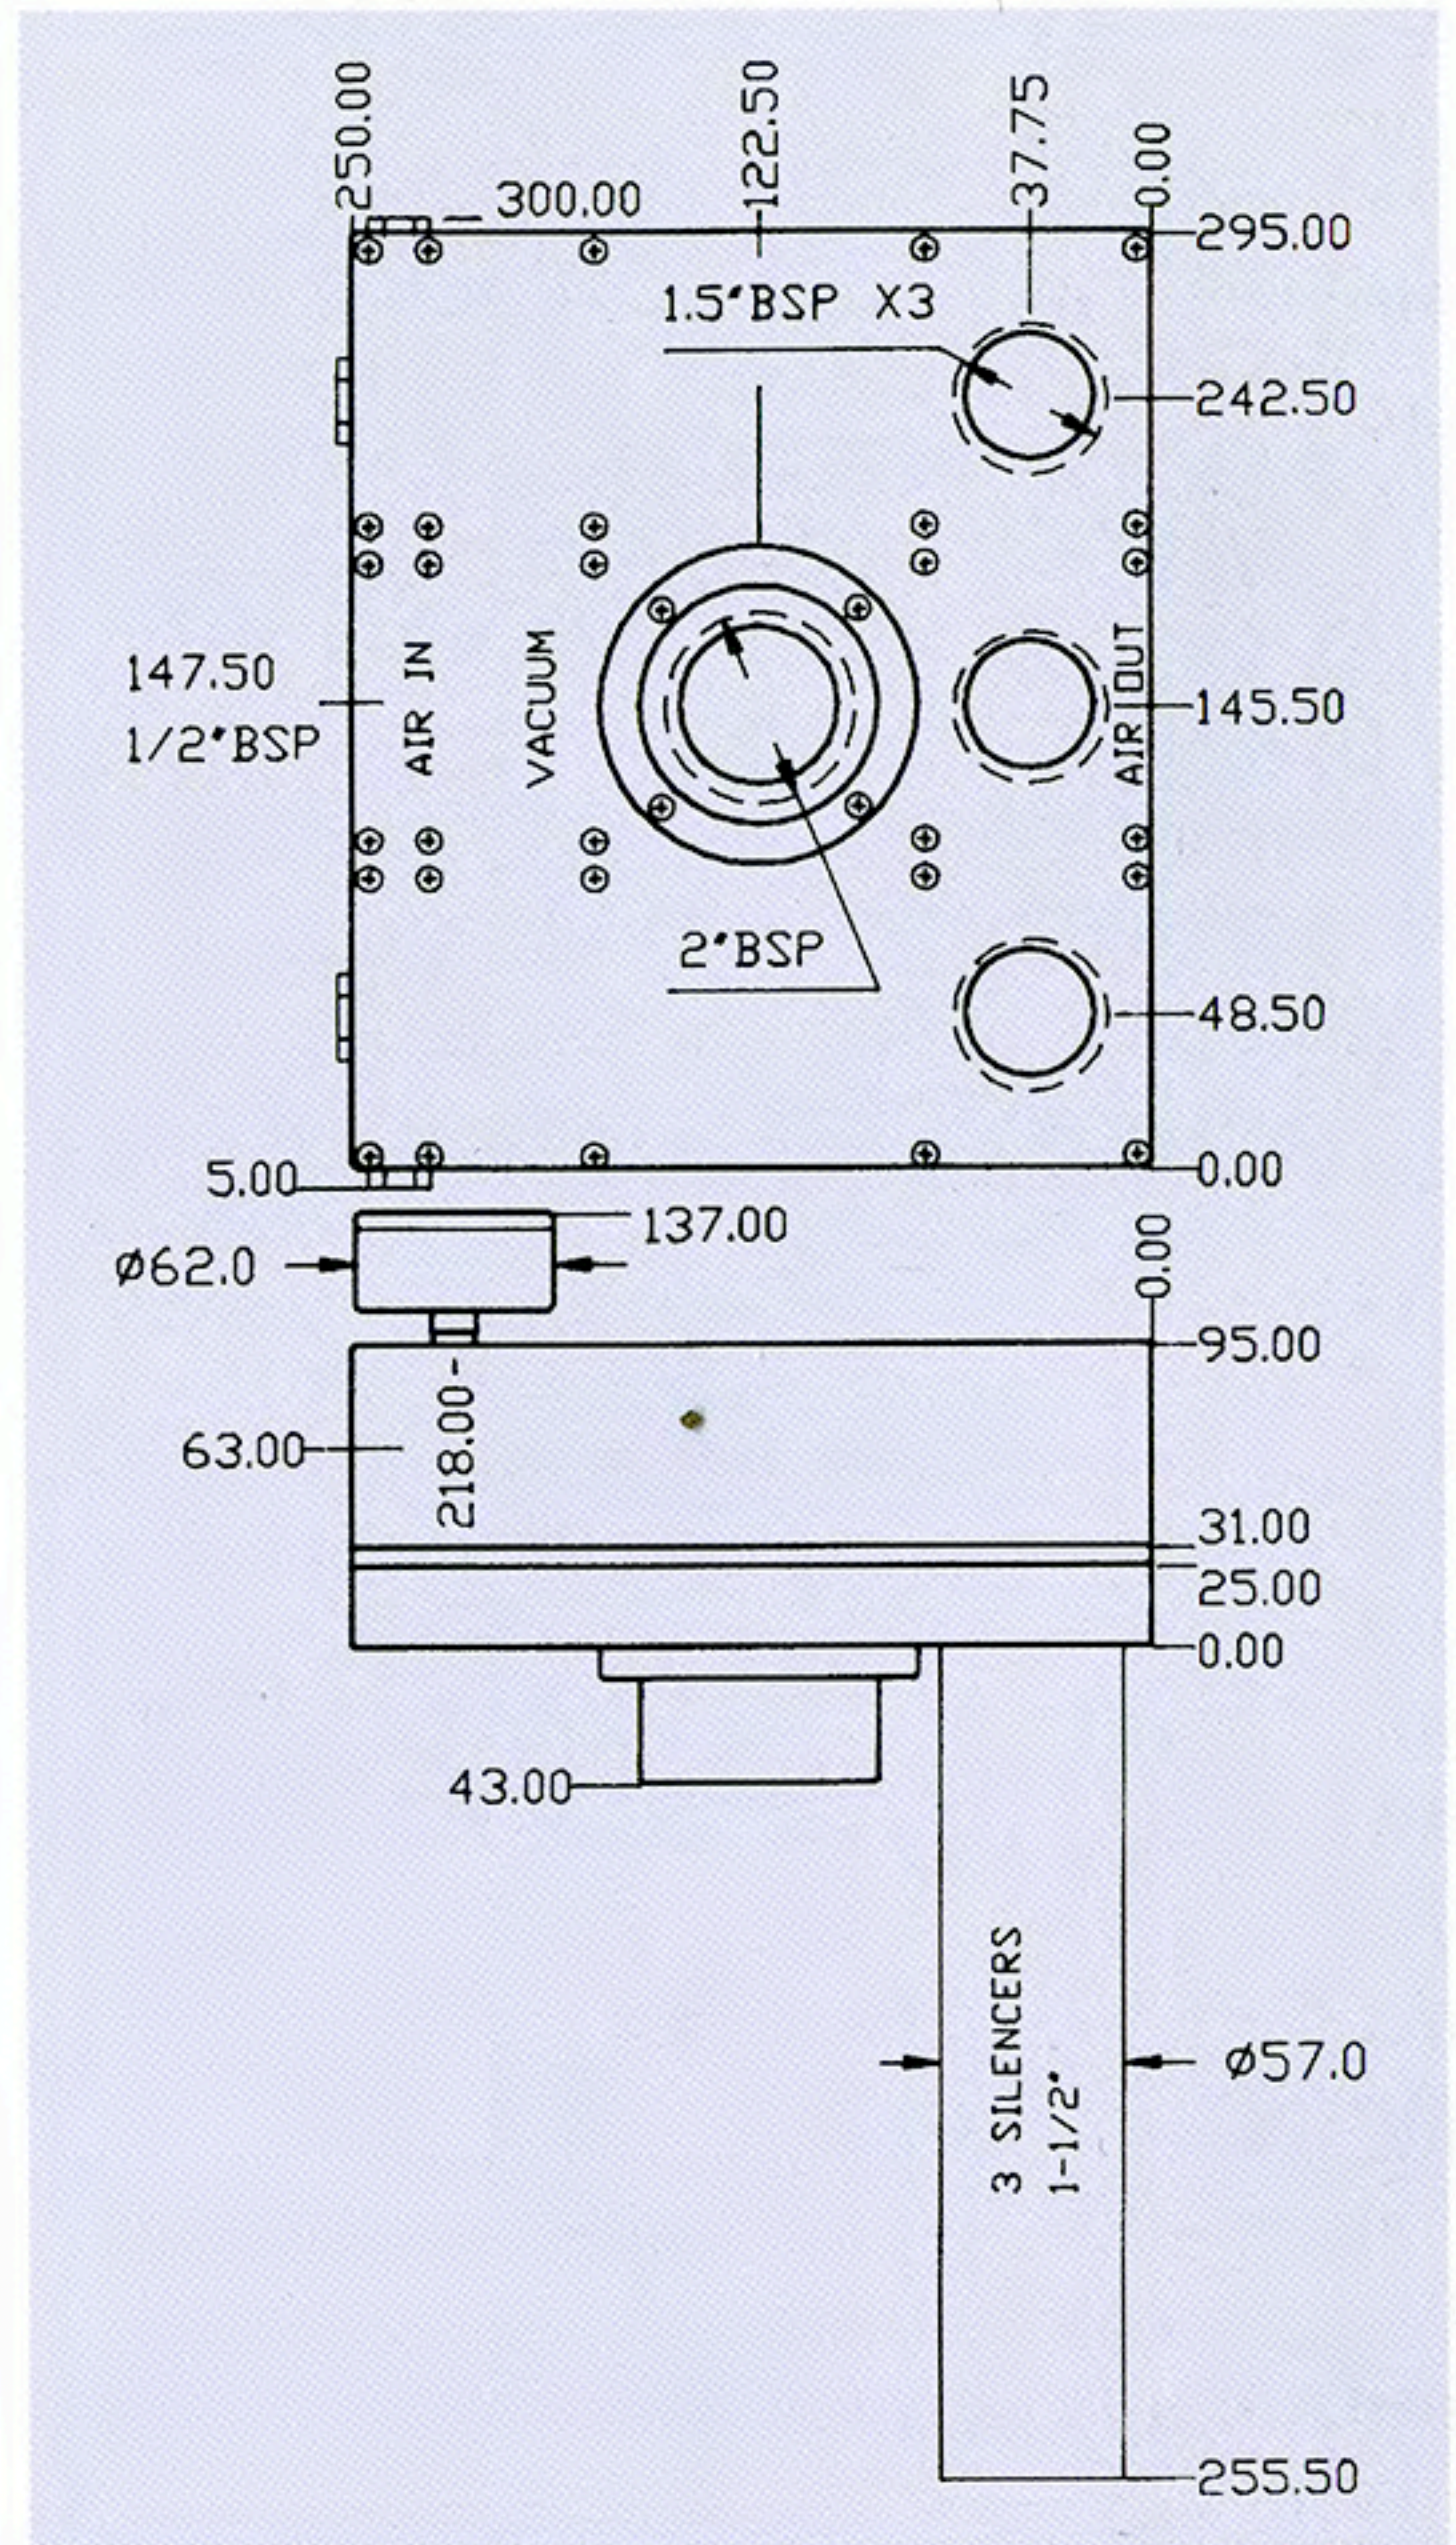

NOTE:

VLP Pumps are often used for high flow vacuum needs in porous materials, cartons, and pressed wood.

AIR AT 6 BAR

vacuum in - BAR	0	0.1	0.2	0.3	0.4	0.5	0.6	0.7
time in sec for evacuation of 1 lit to vac' level								
VLP - 128	-	.0008	.0025	.005	0.01	0.015	0.025	0.044
induced air in lit per min.								
VLP - 128	9600	6120	3780	2340	1620	1350	900	-

